
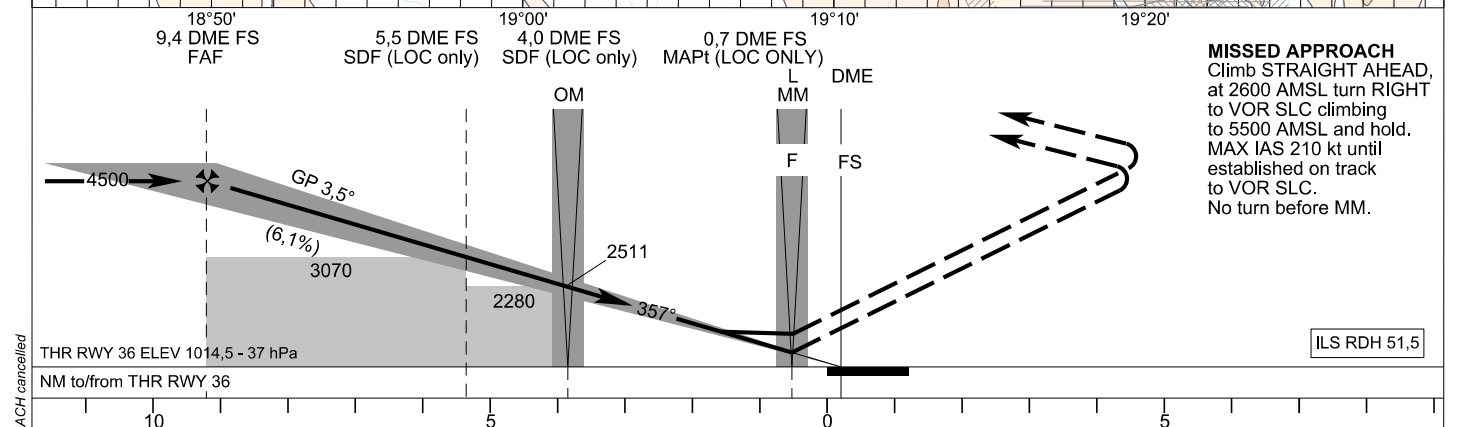


**INSTRUMENT
APPROACH
CHART - ICAO**

TRANSITION ALTITUDE 10 000 ft
AD ELEV 1043,8 - 38 hPa
THR RWY 36 ELEV 1014,5 - 37 hPa

SLIAČ RADAR 119,155
SLIAČ TOWER 122,905

SLIAČ (LZSL)
ILS CAT I or LOC RWY 36
ACFT CAT A/B/C/D

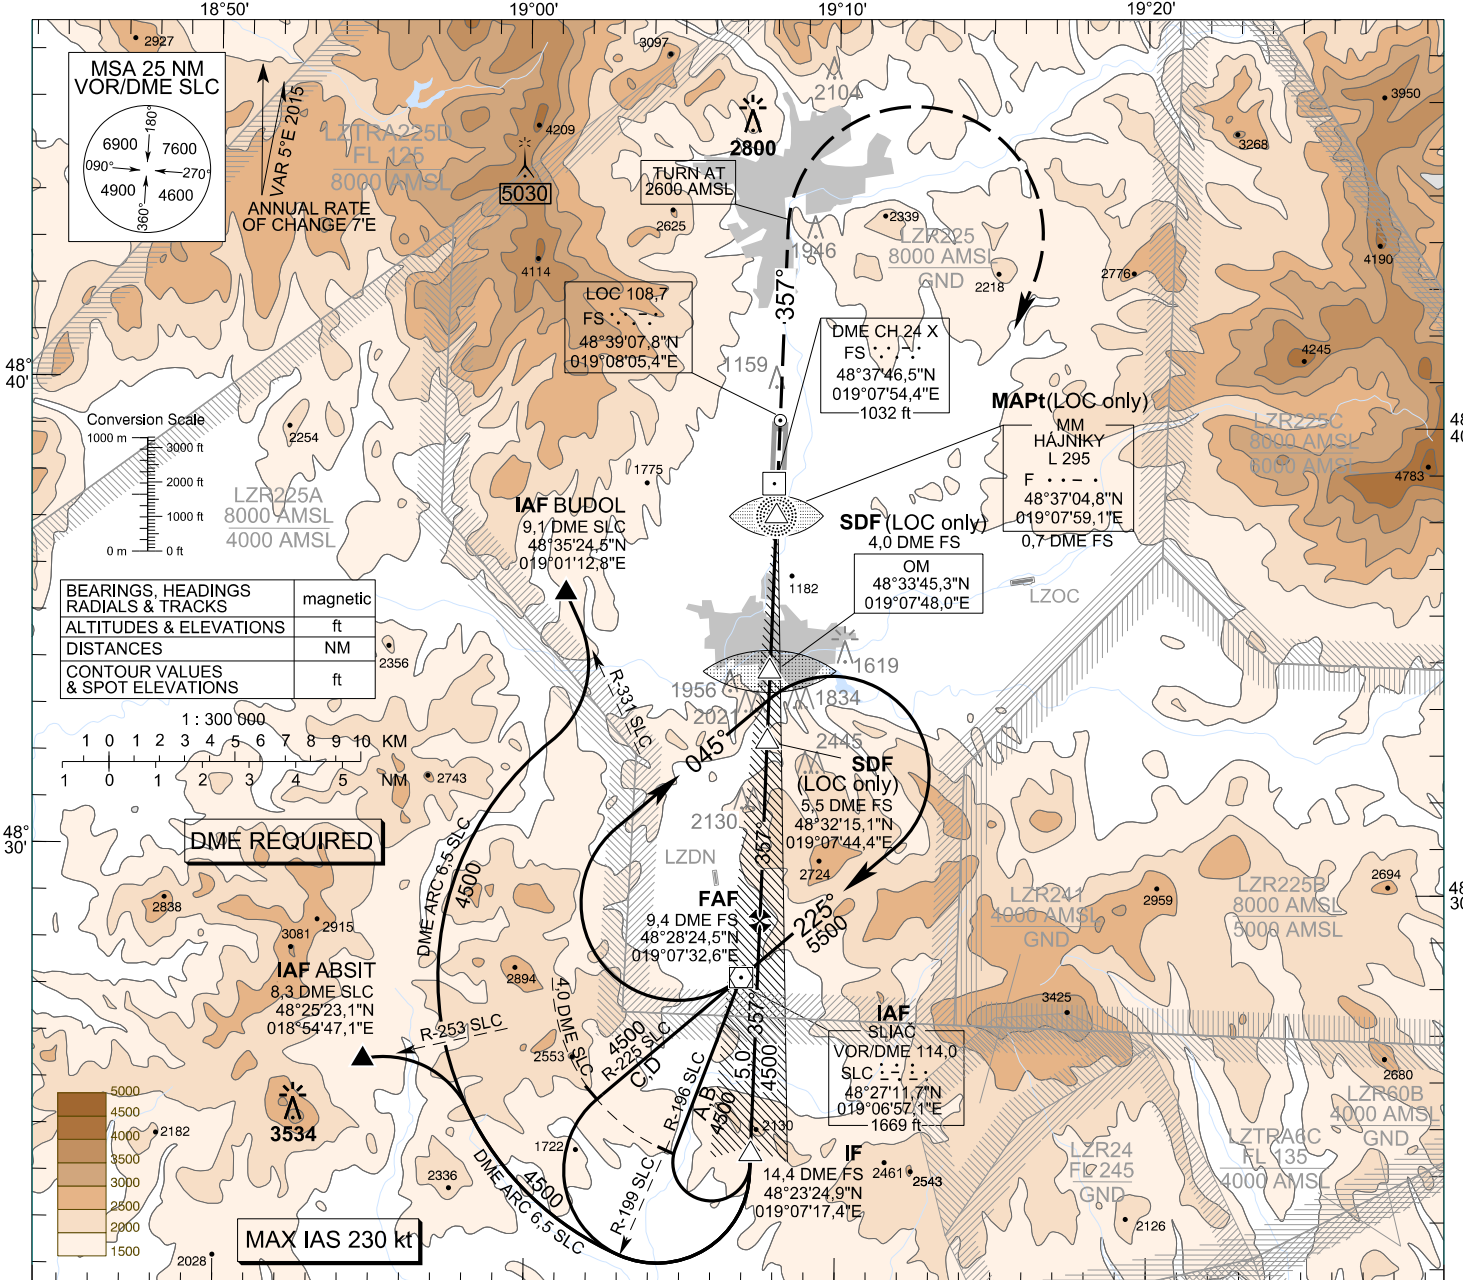

MISSED APPROACH
Climb STRAIGHT AHEAD, at 2600 AMSL turn RIGHT to VOR SLC climbing to 5500 AMSL and hold. MAX IAS 210 kt until established on track to VOR SLC. No turn before MM.

OCA (OCH)		ASC	A				B				C				D									
Straight-In Approach	CAT I	2.5% 5.0%	ft	1763 (749)	1777 (763)	1787 (773)	1800 (786)	3070 (2056)	1940 (946)	3070 (2056)	1620 (606)	2410 (1366)	2810 (1766)	2840 (1796)	Note: Not authorized WEST of the EXTD RCL									
	LOC	2.5% 5.0%	ft												DME FS	NM	9.0	8.0	7.0	6.0	5.0	4.0	3.0	2.0
	without SDF														ALTITUDES	ft	4361	3989	3617	3246	2874	2502	2131	1759
	with SDF														Ground speed	kt		70	90	100	120	140	160	180
	without SDF														FAF - MAPt (8.7 NM)	min:sec	7:27	5:47	5:13	4:20	3:43	3:15	2:54	
	with SDF														Rate of descent (6,1%)	ft/min	434	557	619	743	867	991	1115	
Circling (* see Note)			ft	2410 (1366)	2810 (1766)	2840 (1796)	Timing not authorized for defining the MAPt																	